









Simple, Safe and Cost-Effective UV Disinfection

UV light has been proven in installations around the world as an effective solution for disinfecting the bacteria, protozoa, and viruses that compromise our drinking water, including chlorine-resistant *Cryptosporidium* and *Giardia*. Using UV as the sole primary disinfectant or, as part of a multi-barrier disinfection process ensures a broad range of pathogens are treated, and concentrations of harmful disinfection by-products associated with chemical disinfection are greatly reduced.


UV is a simple, safe and cost-effective disinfection solution. It's a chemical-free process that adds nothing to the water but UV light and therefore requires no transportation, storage or handling of toxic or corrosive chemicals. The contact time required for the UV process is mere seconds, so the footprint required for treatment is relatively small making it ideal for both retrofits and new construction.

TrojanUV systems are treating drinking water for small communities, large municipalities, and everything in between. In fact, New York City has built the world's largest UV disinfection facility for drinking water and we are proud to have supplied the UV equipment which is capable of treating 2.02 billion gallons of water per day.




Compact, Eco-efficient UV Disinfection for Drinking Water

The TrojanUVFlex is our latest innovation and is designed with features to make installation and operation simpler, faster and more cost-effective. Built on our proven Solo Lamp™ Technology platform, TrojanUVFlex allows for energy-efficient high-intensity delivery of UV light in an extremely compact footprint. Advanced controls, monitoring, and validation enable municipalities to provide Water Confidence™ to their customers.

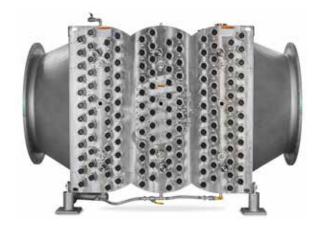



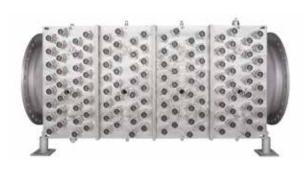

TrojanUVFlex 200 Series

TrojanUVFlex 100 Series

Cost-Saving Cross-Flow Lamp Orientation. TrojanUV Solo Lamps are arranged in arrays engineered to minimize cost. Perpendicular cross-flow lamp orientation reduces operating costs by allowing independently operated sections of lamps to be turned on/off in response to changing treatment conditions and also ensures water continues to be treated by downstream lamps in the event an upstream lamp needs to be replaced.

Future Expansion Made Easy. Chambers can be manufactured with additional banks to accommodate future treatment capacity or UV advanced oxidation for destroying chemical contaminants. This ensures the system meets your current requirements while also planning for future needs.

Flexible Installation Options. The option to install chambers vertically or horizontally makes integration into existing piping straightforward and allows service access from any direction.

Advanced High Dose Validation. Chambers are validated across a wide range of treatment conditions in accordance with the National Water Research Institute (NWRI) and United States Environmental Protection Agency's Ultraviolet Disinfection Guidance Manual (UVDGM) for inactivation of *Cryptosporidium*, *Giardia*, viruses, and other pathogens. The TrojanUVFlex can be designed to meet your disinfection requirements, including high-intensity UV applications such as 4-log virus treatment, in almost any treatment environment.



UV Chamber

A stainless steel chamber houses the lamps and quartz sleeves in a unique cross-flow orientation. Its design has been optimized for highly-efficient treatment in a very compact footprint. Precise UV intensity sensors monitor lamp output optimizing power use & reducing overall energy consumption.

Sleeve Cleaning System (Optional)


Our mechanical sleeve cleaning system removes fouling to ensure the maximum amount of UV light enters the water and is available for treatment. It works automatically, without operator involvement, without draining the UV chamber, and without disrupting treatment. Wiper seals can be replaced easily from outside the UV chamber.




TrojanUV Solo Lamps

The TrojanUV Solo Lamp combines the benefits of low- and medium-pressure lamps, providing high UV output, low power consumption, low lamp count, long lamp life (>15,000 hours), and reduced maintenance. Lamps are located within protective quartz sleeves and are easily accessible for change-outs.



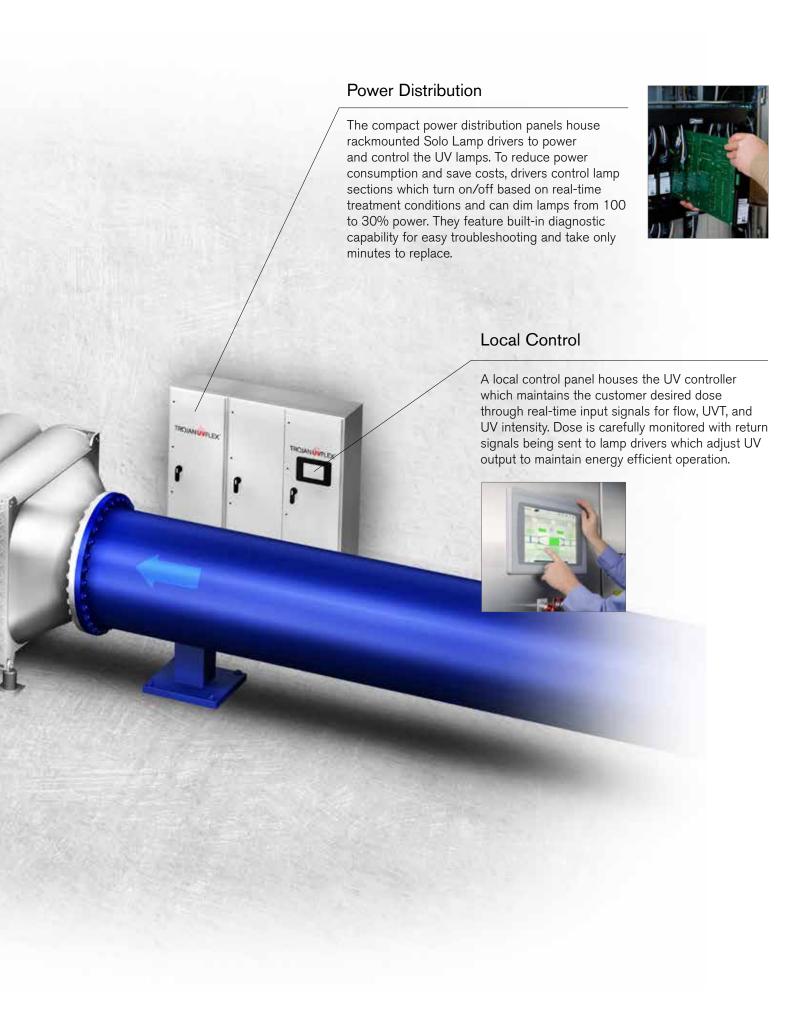


Revolutionary Lamp and Driver Technology





- High UV output and high electrical efficiency
- Low total lamp count (and associated components like drivers and sleeves)
 reduce maintenance costs
- Long lamp life (15,000 hours guaranteed)
- Solo Lamp driver has a high power factor and low total harmonic distortion
- Lamp drivers are rack-mounted in panels for compact footprint and easy replacement

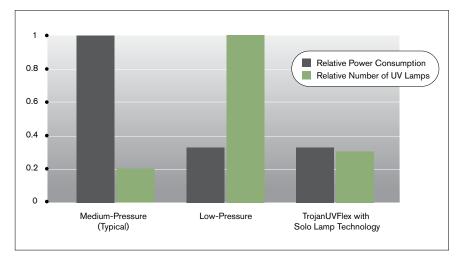

TrojanUV Solo Lamp systems combine the benefits of other lamp technologies – the low lamp count of medium-pressure systems with the high electrical efficiency of low-pressure high-output (LPHO) systems. The result is a compact, cost-effective installation that is easy and quick to maintain.

Compact, Modular UV Chamber

Significantly reduces footprint and installation cost

- Staggered, cross-flow lamp arrays maximize UV output and reduce chamber size
- Compact footprint simplifies indoor retrofit installations and reduces construction costs
- Horizontal or vertical installation allows service access from any direction
- Modular lamp sections enable expandability, redundancy and low power consumption
- Low headloss design reduces or eliminates pumping




The chamber has been designed for delivery of high UV doses in an extremely compact footprint.

State-of-the-Art System Control

Confidently achieve treatment objectives while minimizing operational costs

- Controller processes multiple real-time inputs including flow rate, treatment objectives, UV transmission and system operational parameters (UV sensors and lamp data)
- Computes delivered dose and compares against treatment requirements
- Automatically controls number of lamps turned on and individual lamp power settings
- Optimizes energy use by modulating UV output to match treatment conditions

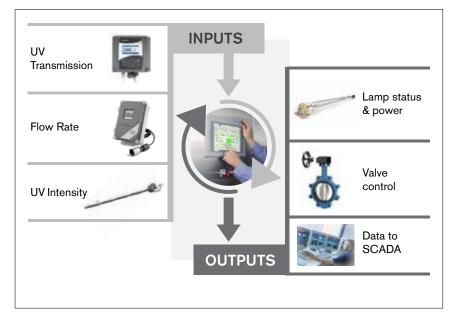

Real-time inputs (left) are utilized in the computation of dose. The system dynamically adjusts lamp power and number of lamps to minimize operation and maintenance costs.

User-Friendly Experience

Designed to make the operator's job easier

- Access lamps, UV sensors, and quartz sleeves all from the outside of the chamber
- "Lamp on" LED indicator on lamp plug provides easy visual determination of lamp status
- Optional mechanical sleeve cleaning system prevents quartz sleeve fouling
- Wiper seals are replaced from outside the UV chamber in seconds
- Integrated chamber hatches provide easy access for internal inspection or maintenance
- Graphic screens and icons make system operation intuitive for operators



All UV systems require periodic maintenance; but TrojanUVFlex allows fast access to all routine maintenance components (including wiper components) from outside the UV chamber. This minimizes maintenance time and makes tasks ergonomic and efficient.

Building Water Confidence

The TrojanUV line of products include open-channel and closed-vessel UV disinfection systems for municipal wastewater and drinking water, as well as UV advanced oxidation systems for the treatment of chemical contaminants in water. We have the largest municipal UV installation base in the world and are proud to play an important role in continually advancing UV disinfection technology and helping to build Water Confidence for communities and municipalities.

Experience. Over 10,000 municipal UV installations; treating 60 billion gallons of water every day (225 million m³/day).

Global Support. Local Service. Our comprehensive network of certified service providers offer rapid response and personalized attention for service, replacement parts and system optimization.

Guaranteed Performance and Comprehensive Warranty. TrojanUV systems include a Lifetime Disinfection Performance Guarantee* and comprehensive warranties for systems and parts.

System Specifications		
System Characteristics	TrojanUVFlex 200 Series	TrojanUVFlex 100 Series
Lamp Type	TrojanUV Solo Lamp - Low Pressure High Output	
Lamp Power	1000 Watts	500 Watts
Lamp Driver	Electronic, variable power (30% to 100%)	
Chamber Material	2205 duplex stainless steel	
Flange Size	48 inch AWWA C207, DN1200	36 inch AWWA C207, DN900
Pressure Rating	Up to 150 psi (PN10)	
Sleeve Cleaning	Mechanical cleaning (Optional)	
Network Connection	AB Ethernet I/P, ProfiNet, Profibus, Modbus TCP/IP, Modbus RTU RS485	
Panel Material	Painted mild steel, 304 stainless steel, 316 stainless steel	
Validation	USEPA and NWRI	

^{*} When you use TrojanUV parts, we guarantee that your system will meet the disinfection requirement specified at purchase, provided that the system's original design parameters haven't changed (e.g., flow rate, UV Transmittance) and maintenance is completed per the UV System O&M manual. Should you experience a disinfection issue, our Service Technicians will work with you to resolve it as fast as possible.

To learn more about the brands and affiliates of Trojan Technologies, please visit www.trojantechnologies.com

