



TECHNICAL SHEET

PENTAIR

PRF RO REVERSE OSMOSIS SYSTEM






PRF RO REVERSE OSMOSIS SYSTEM

TECHNICAL CHARACTERISTICS



- On-demand flow system, continuous flow, no storage tank needed
- Functioning without pump or electricity, line pressure: 2.76 bar
- Consistent membrane efficiency
- High recovery system
- High impact plastic construction
- Compact and sleek styling
- Custom high-flow faucet (with air gap)
- Complete product literature and training support

OUTLINE DIMENSIONS IN INCHES (CM)

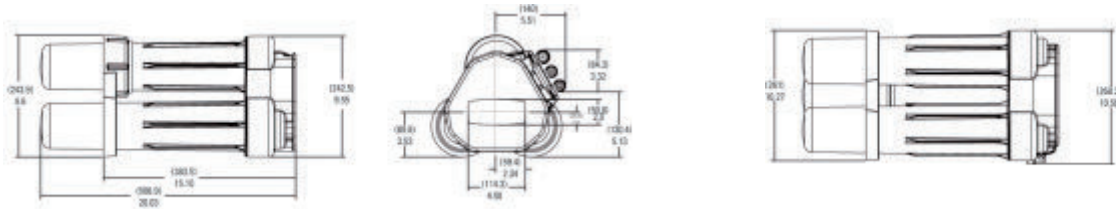

APPLICATIONS

- Steamers
- Coffee makers
- Photography processing
- Water coolers
- Business offices
- Restaurants
- Humidifiers
- Aquariums
- Misters
- Pubs
- Many more profitable possibilities

FILTER/MEMBRANE PERFORMANCE SPECIFICATIONS

Filter Type	Dimensions			
	Length	Diameter	Flow Rate***	Average Life
Carbon Pre-Filter	43.2 cm	7.4 cm	14.2 Lpm	6-12 months, 37 850 L
RO Element	47.6 cm	8 cm	0.95 Lpm	2-4 years
Carbon Post-Filter	25.4 cm	5.1 cm	2.8 Lpm	6-12 months

*** Based on internal testing data.

MINIMUM AND MAXIMUM OPERATING CONDITIONS

Condition**	Minimum	Maximum
Inlet Pressure Conditions	2.76 bar	5.52 bar
Inlet Temperature	4.44°C	37.78°C
Inlet TDS	50 mg/L	2000 mg/L
Inlet Hardness	0 mg/L	171 mg/L
Inlet Chlorine	0 mg/L	1.0 mg/L
Inlet Iron	0 mg/L	0.1 mg/L
Inlet Manganese	0 mg/L	0.05 mg/L

** System is designed for use on potable water sources only.


TUBING/FITTING DIMENSIONS

Inlet Tubing	1.22 m of 12.7 mm natural tubing (4 feet of ½ inch natural tubing)
Concentrate Tubing	1.22 m of 9.53 mm black tubing (4 feet of ¾ inch black tubing)
Permeate Tubing	1.22 m of 9.53 mm blue tubing (4 feet of ¾ inch blue tubing)
Drain Tubing (for airgap installation)	0.91 m of 12.7 mm red tubing (3 feet of ½ inch red tubing)
Drain Connection	9.53 or 12.7 mm (¾ or ½ inch)
Carbon Post-Filter	9.53 mm quick disconnect fittings (¾ inch quick disconnect fittings)

INLET CONNECTORS

Option 1	12.7 x 12.7 x 12.7 mm tee (½ x ½ x ½ inch tee)
Option 2	15.875 x 15.875 x 12.7 mm tee (¾ x ¾ x ½ inch tee)
Option 3	12.7 x 12.7 threaded x 12.7 mm tee (½ x ½ threaded x ½ inch tee)
Option 4	15 x 15 x 12.7 mm tee (0.59 x 0.59 x ½ inch tee)

PERFORMANCE – FLOW RATE CHARACTERISTICS*

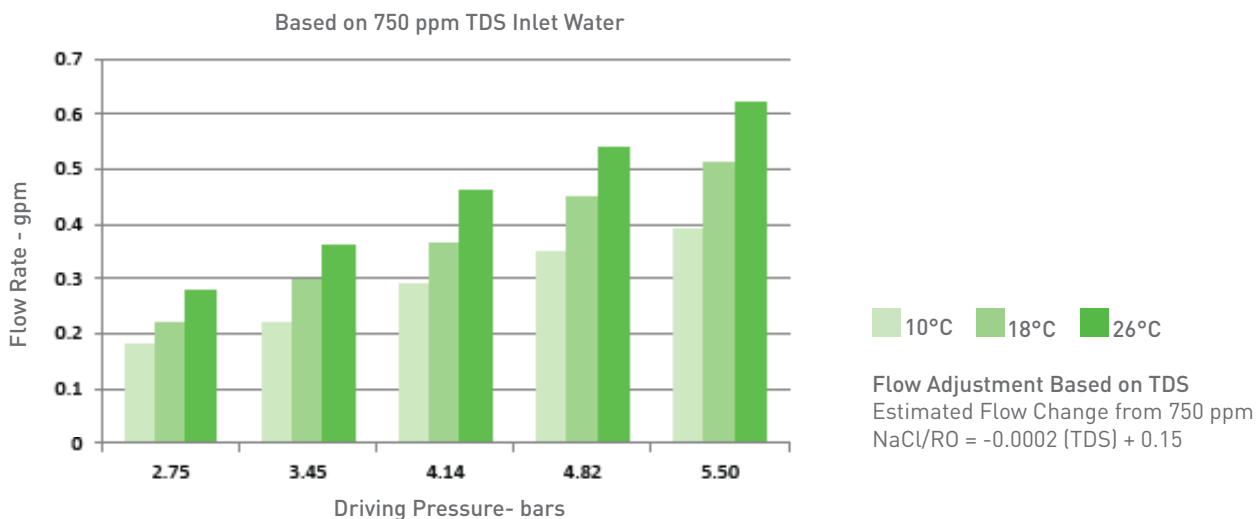

* Estimated flow based on internal test data. Actual performance may vary.

Contact us:

By mail

Commercial support

commercial.prfemea@pentair.com

Technical support

techsupport.water@pentair.com

Marketing support

marketing.prfemea@pentair.com

By phone

Tel. +41 21 623 69 69